

LINE VOLTAGE THERMOSTATS

White-Rodgers™



1A11-2

1A11-2 LIGHT DUTY FAN COIL THERMOSTAT

For Direct Control of Line Voltage Valves and/or Blower Motors on Fan Coil Units Featuring Manual Changeover from Heat to Cool and a 3-Speed Fan Switch, Subbase Included

FEATURES


- Mounts to a standard vertical outlet box or on a two-gang outlet box. May also be mounted on a 4" x 4" junction box with an adapter (not provided).
- Wiring color coded for ease of installation.
- 3-speed manual fan switch: High – Medium – Low.
- System Switch: Heat – OFF – Cool. "OFF" breaks both valve and fan circuits.
- Beige color.

SPECIFICATIONS

Dimensions 4 1/2" H x 4 1/2" W x 2 1/4" D
Agency U.L. listed and C.S.A. approved

PARTS AND ACCESSORIES

- Thermostat Guards — see pages 34–35

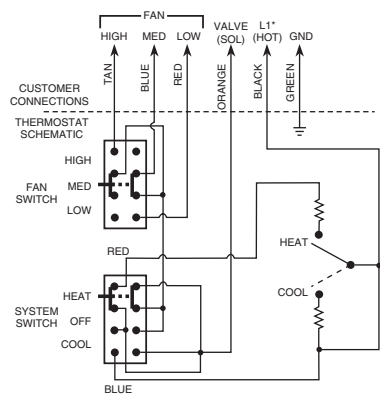

*L1 is Power In
Note: Above FAN and SYSTEM switches shown in MED and HEAT positions respectively.

1A11-2
5-wire with ground, for single valve,
manual heat/cool changeover

- Thermostat cycles both fan and valve
- Thermostat cycles fan only (if valve is not used tape orange lead)
- System "OFF" breaks both valve and fan circuits
- Thermostat cycles valve only with continuous fan (interchange valve and L1 leads)

Model Number	Range	Differential	Switch Action	Contact Ratings						Pilot Duty
				Motor Ratings (inductive) Full Load			Motor Ratings (inductive) Locked Rotor			
1A11-2	36 to 90°F (2 to 32°C)	1.5°F	SPDT	120 VAC	240 VAC	277 VAC	120 VAC	240 VAC	277 VAC	120/240
				5.5A	2.75A	2.3A	33.0A	16.5A	13.8A	277 VAC 120A